




PTSD - Square Drive Hydraulic Torque Wrench

- ProTorc PTSD Hydraulic Square Drive Torque Wrenches are manufactured using high grade aluminium-titanium alloy and high strength alloy steel
- High repeatability can be achieved due to the precise design with an accuracy of +/- 3%
- The 360 x 180 degree uni-swivel hose coupling enables the tool to be used unrestricted in confined areas and eliminates hose kinking
- Torsion resistant housing and torsion free operation
- 360 degree positioning of reaction arm
- Anti-reverse pawl design
- Two Year Manufacturers Warranty *



	PTSD02	PTSD05	PTSD08	PTSD10	PTSD16	PTSD20	PTSD28	PTSD36	PTSD50	PTSD70
Max Torque	1760Nm	4332Nm	7420Nm	10430Nm	15090Nm	19409Nm	26447Nm	34626Nm	47414Nm	69247Nm
Min Torque	164Nm	433Nm	742Nm	1015Nm	1509Nm	1940Nm	2504Nm	3309Nm	4741Nm	6925Nm
Sqr. Drive	3/4"	1"	1 - 1/2"	1 - 1/2"	1 - 1/2"	2 - 1/2"	2 - 1/2"	2 - 1/2"	2 - 1/2"	2 - 1/2"
L1 (mm)	130	170	202	228	237	273	287	323	351	376
L2 (mm)	102	140	160	184	192	223	248	256	271	295
L3 (mm)	182	249	286	326	336	391	433	464	494	528
H1 (mm)	52	70	81	90	100	110	120	138	153	162
H2 (mm)	77	98	125	134	144	164	187	206	217	226
H3 (mm)	96	127	149	172	181	206	221	258	279	291
H4 (mm)	133	165	184	207	216	241	256	293	315	326
R (mm)	25.8	34.8	39.8	46.8	50.8	56.8	59.8	70.8	76.8	78.8
Weight (kg)	2	4	7	10.6	12.9	20	25	33.8	43	52

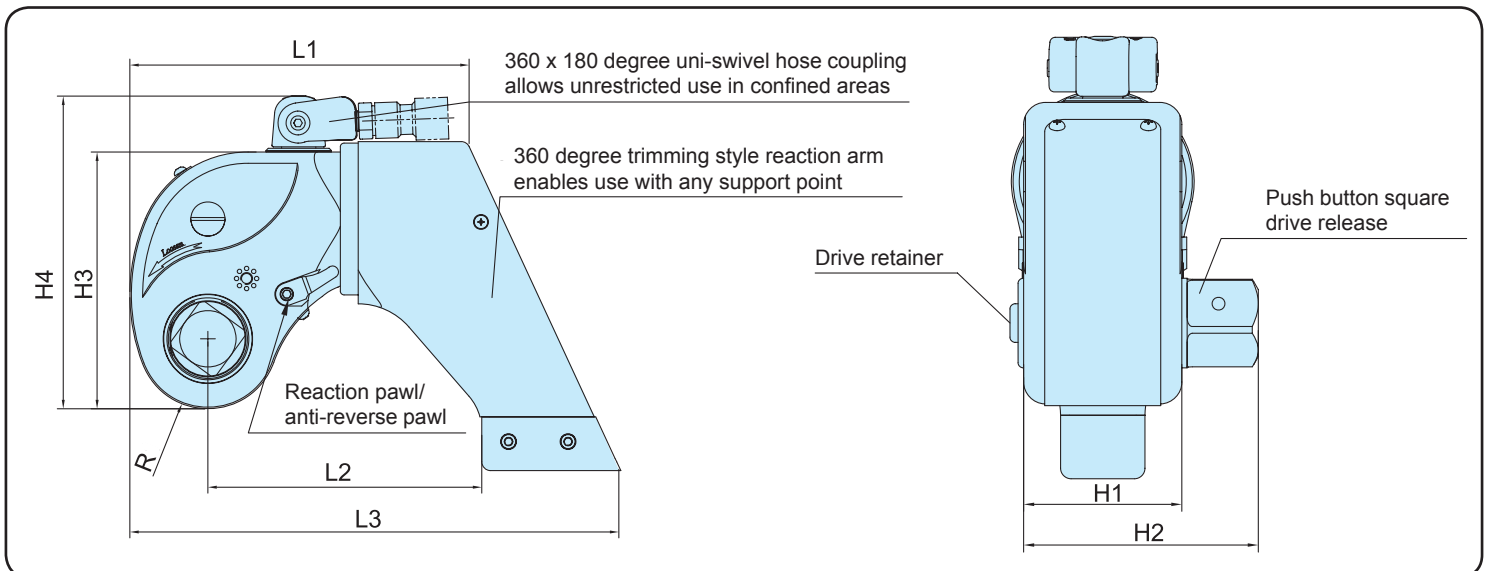

* Conditions apply - contact ProTorc for more information